



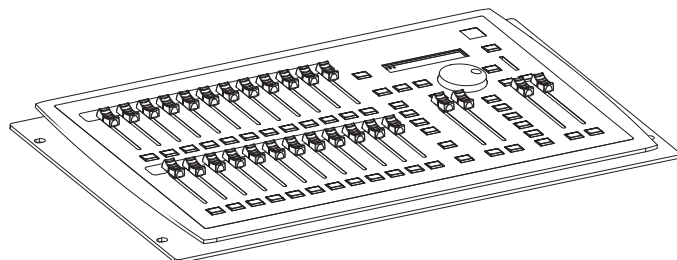

100V 115/120V 230/240V

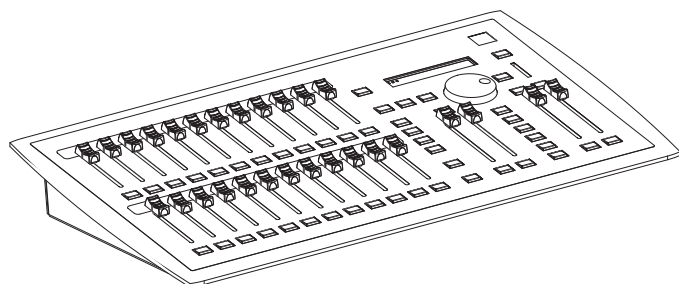

GENERAL INFORMATION

SmartFade = Smart Control. A part of our Smart Solutions product suite.

SmartFade offers a great feature range including hands-on manual control, memory driven operation, and an impressive array of features for systems work. SmartFade 1296 is perfect for those special applications where space is at a premium and high channel count is vital.

APPLICATIONS

- Small TV studio
- Remote film/video rigs

FEATURES

- Preset or memory style operation
- 12 channel two-scene mode with timed fades
- 96 channel Normal mode with 288 Memories
- Fully programmable 199 step cue stack
- 24-Step sequences (chases) (48 available)
- Tap tempo mode for sequence timing
- Magic function for random output
- 10 Snapshot memories for temporary storage
- Undo function
- Master fader and Blackout button
- Bumps master fader
- Solo or pile-on mode for bump buttons
- DMX Backup Mode – 24 Memories x 512 Channels
- LCD display for configuration and preview
- Multiple consoles can be linked via MIDI to increase channel count
- Available in free-standing or 19" rack mount configurations
- DMX512 Output (1 universe of 512 channels)
- DMX512 Input (1 universe of 512 channels)
- MIDI In
- MIDI Out
- USB interface to PC for software upgrades

ORDERING INFORMATION

SmartFade 1296


MODEL	DESCRIPTION
SF1296	SmartFade 1296, 96 Channel Console

SmartFade Accessories

MODEL	DESCRIPTION
SF-RM	19" Rack Mount Bracket
SFMEM	SD RAM Card
PS-INTL	International Power Supply, replacement. Includes plugs for American/Japanese, European 2-pin, British 3-pin and Australian/Chinese 2-pin
SF-DC1	Dust Cover, SmartFade 1248/1296

Other Consoles in the SmartFade Family

MODEL	DESCRIPTION
SF2496	SmartFade 2496, 96 Channel Console
SF1248	SmartFade 1248, 48 Channel Console
SFML	SmartFade ML, 24 moving light/48 intensity channel console



SPECIFICATIONS

MECHANICAL

- 12 channels in two-scene mode
- 96 channels in Normal mode
- 512 DMX Outputs
- 512 DMX Inputs
- 288 memories in Normal mode
- Crossfader pair for cue stacks or sequences
- Manual, timed or rate-Override playback in all modes
- 199 step cue stack
- 4 Sequence faders x 12 pages
- 24 step sequences
- SD card slot for show backup
- LCD Menu for configuration and preview
- English, French, German and Spanish language support

PLAYBACK CONTROLS

- Channel Faders
 - 2 preset banks x 12 channels in 2 scene mode
 - 24 channel faders x 4 banks in Normal mode for access to all 96 channels
 - Individual bump buttons on all channel faders with solo or pile-on operation
- Memory Faders
 - 24 memory faders x 12 pages in Normal mode for access to all 288 memories
 - Individual bump buttons on all memory faders with solo or pile-on operation
- Backup Faders
 - 24 memory faders in DMX Backup mode for access to DMX backup looks
 - Each memory can store 512 channels
- Crossfaders
 - Crossfader pair for manual, timed or rate-override playback in all modes with Go, Pause, Rate and Clear buttons
- Master fader and Blackout button
- Bumps fader
- Independent channels (IND1 and IND2)

PROGRAMMING TOOLS

- Snapshot storage
 - Ten locations for temporary storage of memories
- Magic
 - Magic function creates random levels and random chases
- Editing
 - Memories, cue stack and sequences can be edited
 - Cue stack and sequence steps can be inserted, moved and deleted individually

INTERFACES

- DMX512 Output
- DMX512 Input
- USB
- MIDI in
- MIDI out

PHYSICAL

SmartFade 1296 Dimensions*


MODEL	HEIGHT		WIDTH		DEPTH	
	inches	mm	inches	mm	inches	mm
Smartfade 1296	2.4	61	17.6	447	10.3	261

SmartFade 1296 Weights*


MODEL	WEIGHT	
	lbs	kgs
Smartfade 1296	6	3

*Weights and dimensions typical


DMX Console Applications

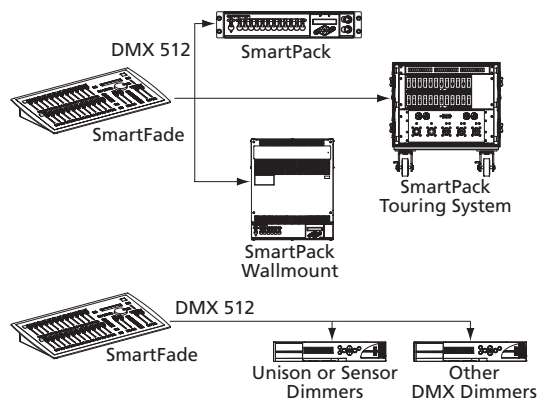

Other System Applications

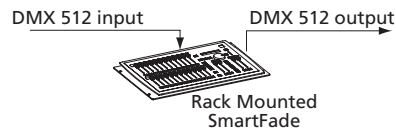

DMX Backup Mode Application

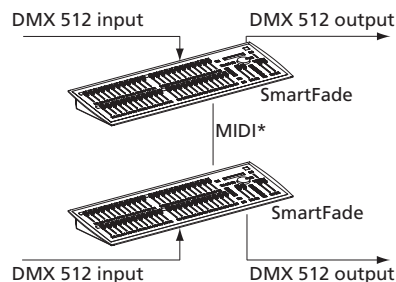

Corporate Headquarters • 3031 Pleasant View Rd, PO Box 620979, Middleton WI 53562 0979 USA • Tel +1 608 831 4116 • Fax +1 608 836 1736
London, UK • Unit 26-28, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK • Tel +44 (0)20 8896 1000 • Fax +44 (0)20 8896 2000
Rome, IT • Via Pieve Torina, 48, 00156 Rome, Italy • Tel +39 (06) 32 111 683 • Fax +39 (06) 32 656 990
Holzkirchen, DE • Ohmstrasse 3, 83607 Holzkirchen, Germany • Tel +49 (80 24) 47 00-0 • Fax +49 (80 24) 47 00-3 00
Hong Kong • Room 1801, 18/F, Tower 1 Phase 1, Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong • Tel +852 2799 1220 • Fax +852 2799 9325
Web • www.etcconnect.com • Copyright©2011 ETC. All Rights Reserved. All product information and specifications subject to change. 7219L1004 Rev. D 09/11