

GENERAL INFORMATION

The Unison Heritage IR Remote is designed to give you control from a distance. The handheld remote allows you to trigger control functions from up to 35 feet away from your wall mounted stations. The Unison Heritage IR Remote can be programmed to mimic the control function of the buttons on a station or to activate separate functions allowing for flexibility in any application.

APPLICATIONS

- Churches
- Hotels
- Convention Centers
- Meeting Rooms
- Schools
- Restaurants

FEATURES

- RemoteDirect – easy interface to the built in InfraRed (IR) receiver on button and fader stations allowing for optional IR remote control at every station
- Configured to mimic button and fader station programming, or to control separate functions
- Available in 5 or 10 button configurations

ORDERING INFORMATION

Unison Heritage IR Remote

MODEL	DESCRIPTION
UHIR-05	Unison 5-button IR Remote
UHIR-10	Unison 10-button IR Remote



SPECIFICATIONS

GENERAL

- Remote control of button functions for any Unison Heritage Control Station

FUNCTIONAL

- Recall preset or custom button functions
- 35' usable range - line of sight, up to 30 degrees off axis
- Button functions include: preset selection, record mode activation, station lockout, raise, lower, macro activation, zone on/off control, timed event override and wall open/close or toggle
- Custom button functionality programmable via LightDesigner configuration software

MECHANICAL

- Constructed of a black ABS plastic
- Contains five or ten rubber buttons

ELECTRICAL

- Requires two AAA batteries (included)

THERMAL

- Ambient room temperature: 0-40°C / 32-104°F
- Ambient humidity: 30-90% non-condensing

PHYSICAL


IR Remote Dimensions*

MODEL	HEIGHT		WIDTH		DEPTH	
	inches	mm	inches	mm	inches	mm
UHIR-05	7.50	191	1.50	38.0	.600	15.2
UHIR-10	7.50	191	1.50	38.0	.600	15.2

IR Remote Weights*

MODEL	WEIGHT		SHIPPING WEIGHT	
	lbs	kgs	lbs	kgs
UHIR-05	0.2	0.1	1.7	0.8
UHIR-10	0.2	0.1	1.7	0.8

*Weights and dimensions typical

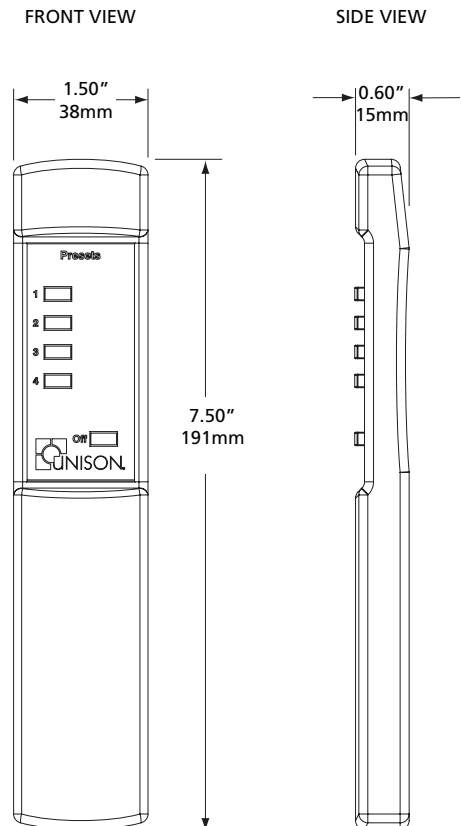

Corporate Headquarters • 3031 Pleasant View Rd, PO Box 620979, Middleton WI 53562 0979 USA • Tel +1 608 831 4116 • Fax +1 608 836 1736
 London, UK • Unit 26-28, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK • Tel +44 (0)20 8896 1000 • Fax +44 (0)20 8896 2000
 Rome, IT • Via Ennio Quirino Visconti, 11, 00193 Rome, Italy • Tel +39 (06) 32 111 683 • Fax +44 (0) 20 8752 8486
 Holzkirchen, DE • Ohmstrasse 3, 83607 Holzkirchen, Germany • Tel +49 (80 24) 47 00-0 • Fax +49 (80 24) 47 00-3 00
 Hong Kong • Room 1801, 18/F, Tower 1 Phase 1, Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong • Tel +852 2799 1220 • Fax +852 2799 9325
 Web • www.etcconnect.com • Copyright©2009 ETC. All Rights Reserved. All product information and specifications subject to change. 7181L1120 Rev. A Printed in USA 01/09

Unison® products protected by one or more of the following U.S. Patent Numbers 5,323,088, 5,352,958 and 6,849,943; European Patent Number 0603333; German Patent Number 69203609; US and International patents pending